


INSTALLATION INSTRUCTIONS

MAKE: FORD *MODEL:* Power Stroke *YEAR:* 2008-2010 *ENGINE:* V8-6.4L (td) *WHEELBASE:* 156" to 172"

4" Race Pipe 49-43024 (409SS)

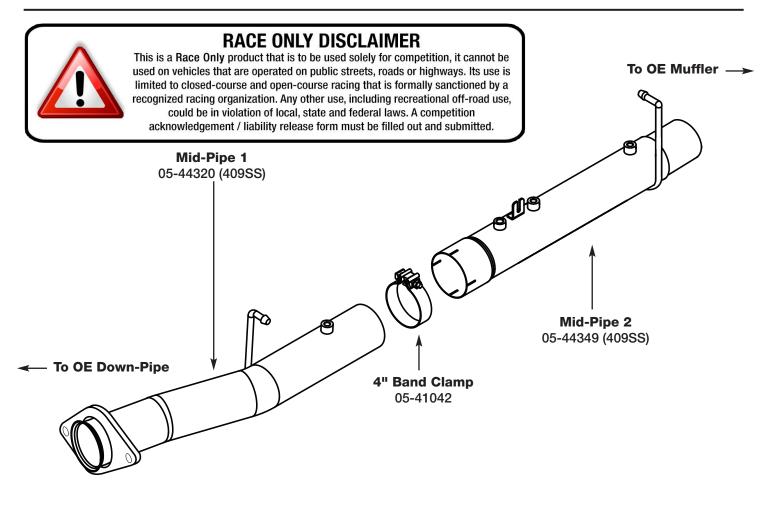

Step 1: (Read Instructions prior to installation) Disconnect sensors at the connections. Take caution as not to damage any sensors. Remove the CAT/DPF section of your trucks exhaust working your way forward. Take caution not to damage the factory isolation mounts as they will be reused. It is recommended to not fully tighten the clamps until the entire system has been installed.

Step 2: For ease of installation spread the pieces of the exhaust along side of your vehicle according to the diagram shown above.

Step 3: Attach mid-pipe 1 first using supplied nuts and bolts to OE turbo down-pipe, then install mid-pipe 2 with the supplied band clamp between mid-pipe 1 and OE pipe attached to OE muffler.

Step 4: Re-install (1) pressure sensor, (3) t/c sensors and connect to harness. Use the provided 1/4" screw, nut and washer to retain pressure sensor bracket.

Step 5: Adjust for alignment and tighten all connections. Your installation is now complete. It is recommended to re-tighten all exhaust components after the first 50-100 miles.

NOTE:

• aFe recommends that the tailpipe be at least 1/2"-1" away from any body panels to avoid heat related body damage. Tighten and secure.

Caution: Allow time for your vehicle to cool down prior to installation. When working on or under your vehicle proceed with caution. Exhaust systems reach high temperatures and may cause serious burns. Wear protective safety equipment; eye goggles and gloves to ensure a safe installation. **aFe recommends professional installation on our products.**