

# installation instructions 5" ELECTRONIC TACHOMETER



2650-995X-10

#### FOR USE ON STANDARD AND MOST ELECTRONIC IGNITIONS

**NOTE:** This tachometer operates on standard, factory electronic and high performance electronic racing ignitions, such as Laser II, Hy Fire and MSD. This tachometer is not recommended for u se on Accel BEI or Laser I ignitions.

**NOTE:** This tachometer has an air core meter. With power off, it is normal for the pointer to leave zero. When power is applied, the pointer will move to the correct position.

## **Engine Cylinder Adjustments**

#### 4, 6, 8 Cylinder

**IMPORTANT:** It is necessary to make the proper adjustments to adapt this tach to your cylinder range. Simply set the switches as shown for either 4, 6, or 8 cylinders.


**WARNING:** This tachometer **WILL NOT** work on a 12 POLE/6 PULSE outboard. Using it as such will cause damage to the tachometer and void the warranty.


#### 12 POLE/6 PULSE


**NOTE:** The 10,000 RPM tach can only be set to 12 POLE/6 PULSE. Make sure it is correctly set at the 12 POLE/6 PULSE position.


### Wiring & Mounting

- 1. Cut a 4-5/8" hole in the dashboard for the tachometer.
- 2. Connect the tachometer wires as shown below (FIGURE A).
- Secure the tachometer to the dash board using the brackets, nuts and star washers provided (FIGURE B).

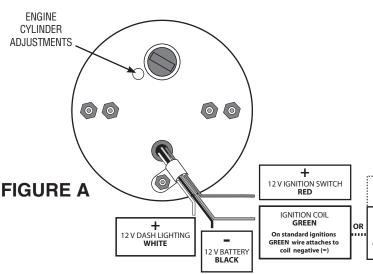





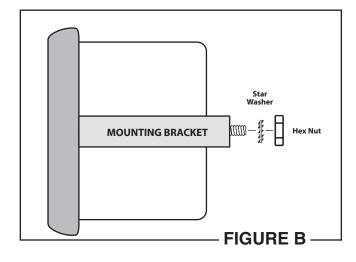

# WARNING Warranty will be void if connected to coil on MSD ignitions. TACH TERMINAL GREEN Use tach terminal on electronic ignitions if available (MSD, GM, HEI). If tach terminal is not available use coil negative (-)

#### **SERVICE**

For service send your product to Auto Meter in a well packed shipping carton. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. If you need it back immediately mark the outside of the box "RUSH REPAIR," and Auto Meter will service product within two days after receiving it. (\$10.00 charge will be added to the cost of "RUSH REPAIR.") If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

#### 12 MONTH LIMITED WARRANTY

Auto Meter Products, Inc. warrants to the consumer that all Auto Meter High Performance products will be free from defects in material and workmanship for a period of twelve (12) months from date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at Auto Meter's option to the consumer, when it is determined by Auto Meter Products, Inc. that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter instruments. In no event shall his warranty exceed the original purchase price of the Auto Meter instruments nor shall Auto Meter Products, Inc. be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the instrument seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Products, Inc. disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter.