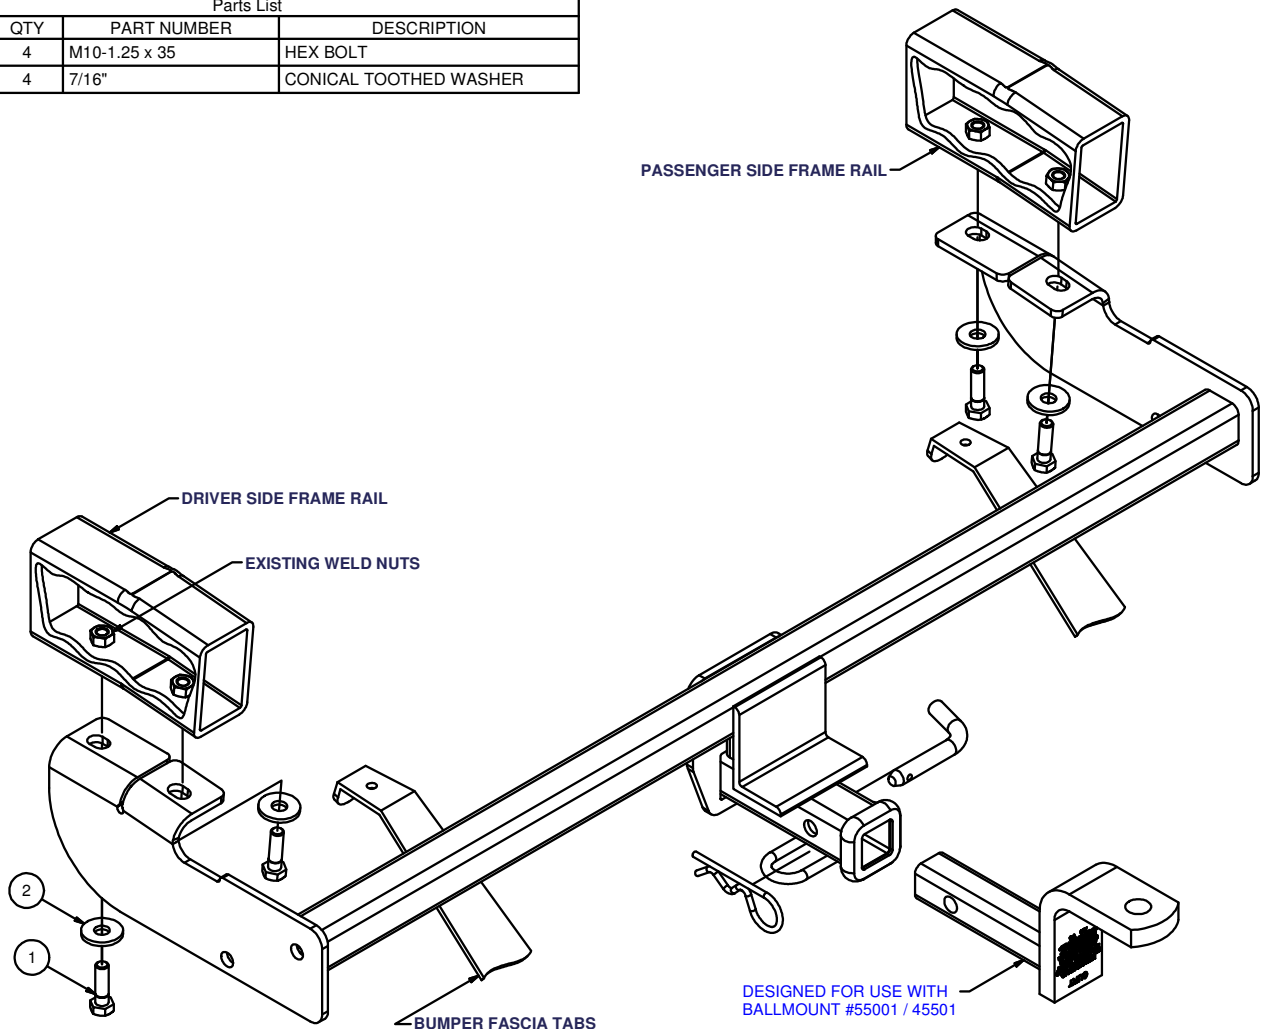


11488 / 247488**04-06 SCION xA****10/8/2012**

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 2,000 LBS. TRAILER WEIGHT & 200 LBS. TONGUE WEIGHT.
*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	4	M10-1.25 x 35	HEX BOLT
2	4	7/16"	CONICAL TOOTHED WASHER

**HITCH WEIGHT: 28 LBS.****INSTALL TIME: 20 MINUTES****INSTALL NOTES:**

- NO DRILLING REQUIRED
- LOWER EXHAUST FOR EASE OF INSTALLATION

INSTALLATION STEPS

- 1) Remove tow hooks from driver and passenger side frame rails if equipped. (Return to customer.)
- 2) Remove plastic push fastener from rear bumper fascia straps. (Reuse later.)
(Note: for ease of installation, remove rear exhaust hanger, until finished)
- 3) Raise hitch into position and secure with hex bolts and conical washers through existing weldnuts as shown.
- 4) Reinstall rear bumper fascia straps removed in step 2.
- 5) Torque all 10mm fasteners to 48 lb-ft. Re-install exhaust hanger previously removed.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.