


130934  
07-10 JEEP JK 4 DR FULL RACK EXTENSION

**OFF CAMBER  
FABRICATIONS**

by: **MBRP** INC.

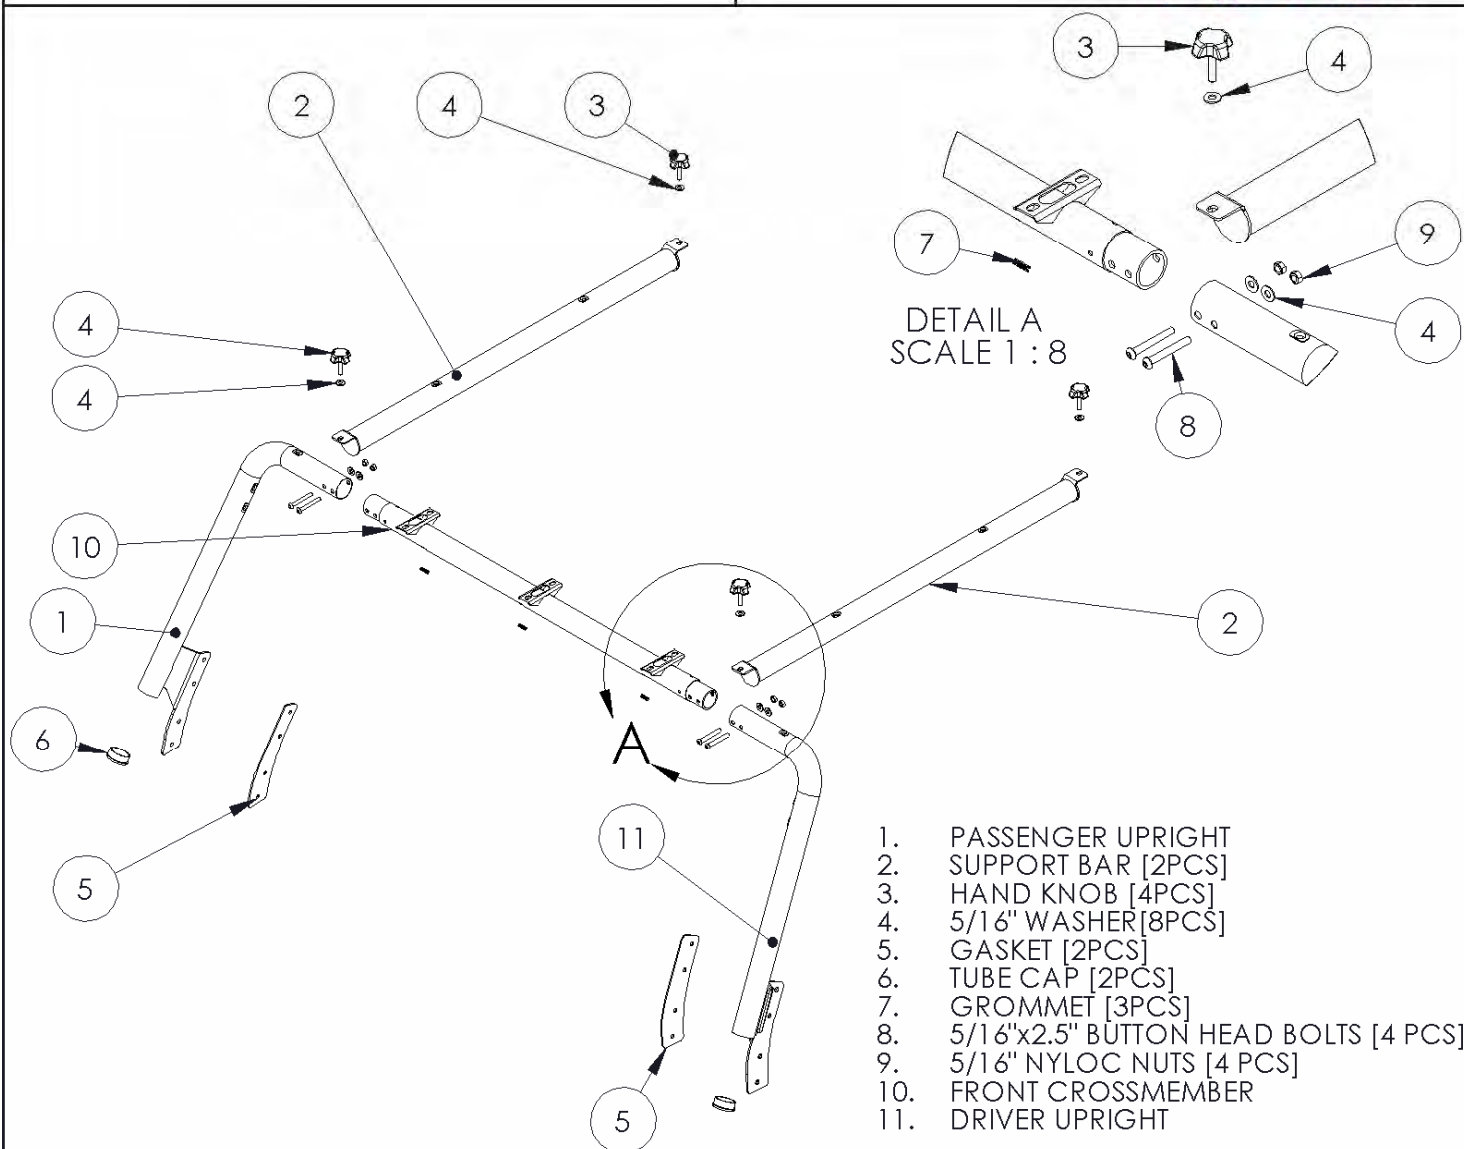

## PLEASE READ BEFORE STARTING INSTALLATION

While MBRP Inc. has made every effort to ensure that all components of this kit are of superior quality and properly packaged, it is the installer's responsibility to ensure the following before starting:

- that ALL components shown above are present.
- that ALL mating components fit together.
- that there are no damaged components.
- that the kit you have purchased is appropriate for your year and model of vehicle.
- that the kit will not interfere with any modifications previously installed or planned.
- that you have read and understand these instructions.

If you have any questions or are uncertain about any aspect of the installation of this kit on your vehicle please contact your dealer before commencing installation.

## 2007-2010 Jeep JK 4dr Full Rack Extension Kit



Figure 1



Figure 2

### NOTE:

This kit requires the installation of **Off Camber Fabrications** Roof Rack Kit # 130717 prior to installation of this Full Rack Extension Kit # 130934.

1. Install the five **Grommets** into the wiring holes on the underside of the **Windshield Hoop**.

2. Remove the four Torx headed fasteners from the left and right side windshield brackets. Keep these fasteners, you will reuse them.

**Refer to Figure 1.**

3. Loosely install the **Driver Upright** and **Passenger Upright** to the Jeep with the previously removed Torx head fasteners. Be sure to install the **Gaskets** between the body and the **Uprights**. Install the **Front Crossbar** between the **Uprights** and secure with the supplied **5/16" x 2.5 Bolts**, **5/16" Washers**, and **5/16" Nyloc Nuts**. Be sure the wiring holes are facing forward. Do not fully tighten yet.

**Refer to Figure 2.**

4. The **Support Bars** attach to the **Windshield Hoop**, and the previously installed **Roof Rack** with the supplied **Hand Knobs** and **5/16" Washers**. The **Windshield Hoop** may need to be adjusted to help align the **Support Bars**. If your **Roof Rack** does not have 2 threaded nuts welded on the Roof Rack at the location shown in Figure 4, please contact *MBRP Inc.* for the required retrofit kit.

**Refer to Figures 3 and 4.**



Figure 3

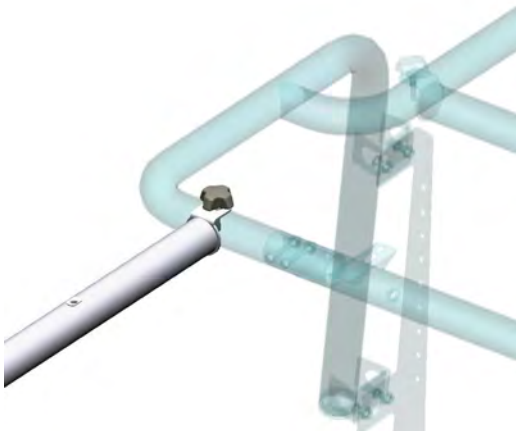


Figure 4



**Figure 5**

5. Tighten the eight [four per side] torx fasteners starting from the top and working down. The surface of the Jeep is not flat. The fasteners must be tightened in this order to allow the mounting brackets to fit correctly.

**Refer to Figure 5.**

6. Install the **Center Crossmember** in the position of your choice with the supplied **Hand Knobs** and **5/16" Washers**.

**Refer to Figure 6.**

7. Install the **Tube Caps** with a soft faced hammer.



**Figure 6**

Congratulations! You are finished. We are sure that you will enjoy this

***Off Camber Fabrications*** product by *MBRP Inc.*