

ROUGH COUNTRY

SUSPENSION SYSTEMS®

84-01 6.5" MJ Comanche LIFT KIT

Thank you for choosing Rough Country for your suspension needs.

Rough Country recommends a certified technician installs this system. In addition to these instructions, professional knowledge of disassemble/reassembly procedures as well as post installation checks must be known. Attempts to install this system without this knowledge and expertise may jeopardize the integrity and/or operating safety of the vehicle.

Please read all the instructions before beginning the installation. Check the kit hardware against the parts list. Be sure you have all the needed parts and understand where they go. Also please review the tools needed and make sure you are confident about undertaking this installation. If you have any questions about the installation of this kit, call Rough Country at 800-222-7023.

PRODUCT USE INFORMATION

⚠ WARNING

As a general rule, the taller a vehicle is the easier it will roll. We strongly recommend, because of roll-over possibility, that the vehicle be equipped with a functional roll-bar and cage system. Seat belts and shoulder harnesses should be worn at all times. Avoid situations where a side rollover may occur.

Braking performance and capabilities are decreased when significantly larger/heavier tires and wheels are used. Take this into consideration while driving. Also, speedometer recalibration is necessary when larger tires are installed.

Do not add, alter, or fabricate any factory or after-market parts which increase vehicle height over the intended height of the Rough Country product purchased. Mixing component brands, lifts, voids all warranties. Rough Country makes no claims regarding lifting devices and excludes any and all implied claims. We will not be responsible for any product that is altered.

This kit features Rough Country's adjustable joint design. Adjustable end tool is included in kit. Assemble the joints per the separate instruction sheet Part # 92RCJ120 provided

The 6.5+ suspension system was developed for 33x11.50x15 tire on 15 x 8 after market wheel with 3.75+ of back spacing. This tire size may require the installation of aftermarket flares and due to variation in vehicles when manufactured and the numerous options available, the amount of actual lift gained by this lift kit will vary. On models outfitted with extra bolt-on equipment and accessories, Rough Country offers new coil spring isolator pads made from polyurethane to boost ride height 3/4".

⚠ NOTICE

NOTICE TO DEALER AND VEHICLE OWNER

Any vehicle equipped with any Rough country product must have the warning to Driver+decal installed on the sun visor or dash. The decal is to act as a constant reminder for whoever is operating the vehicle of its unique handling characteristics. **INSTALLING DEALER-** It is your responsibility to install the warning decal and to forward these installation instructions on too the vehicle owner for review and to be kept in the vehicle for its service life.

TOOLS NEEDED:

Spring Compressor

Pitman Arm Puller

Silicone Spray

1/2" Drill

Drill Assortment (1/8" to 1/2")

Torque Wrench

Hammer

1/2" Drive Ratchet and Sockets

Combination Wrenches

Allen Wrenches

Torx Key Socket

Tape Measure

File

Large "C" Clamps and/or Bench Vise

Hydraulic Floor Jacks

Heavy Duty Jack Stands

Wheel Chocks (Wooden Blocks)

Grease or Anti Seize Compound

If question exist we will be happy to answer any questions concerning the design, function, and correct use of our products. Please call us at 800-222-7023. The required installation time for this kit is 6-8 hours.

KIT CONTENT

Kit Includes:

RC0250– Spring Perch (2)

1042- Forged Adj Track Rod

1697.20-Shock Absorbers:

Front Shock # 658693

Rear Shock # 658697

9275-Front Coil Springs

1696 Kit Box Including:

Rear Lifted Shackles (2)

Front Upr Adj Control Arms (2)

Front Lwr Adj Control Arms (2)

Front Disconnect Assemblies (2)

Front Disconnect Bracket (2)

Pitman Arm

Front Brake Line Brackets (2)

Rear Components:

Rear Brake Line Bracket

Rear U-bolts (4)

Transfer Case Drop Spacers (4)

For Rear Shackle:

Bushings (4)

Sleeves (2)

9/16" x 4" Bolts (2)

9/16" Lock Nuts (2)

14mm x 110mm Bolts (2)

14mm Lock Nuts (2)

Flat Washers (8)

For Transfer Case Spacers:

10mm x 60mm Bolts (4)

For Front & Rear Brake Line Brackets:

5/16" X 3/4" Bolts (3)

5/16" Lock Nuts (3)

5/16" Flat Washers (3)

For Pitman Arm:

Cotter Pin

For Sway Bar Bracket:

3/8" x 1 1/4" Bolt (2)

3/8" Flange Lock nut (2)

3/8" Flat Washers (2)

For Sway Bar Disconnects:

5/16" x 1" Tap Bolts (4)

3/8" x 1 1/4" Bolts (2)

Thick Washers (2)

Disconnect Pins (2)

Hitch pins (2)

Rod Ends (2)

1/2" Nuts (2)

1/2" Flat Washer (2)

1/2" Flange Lock Nut (2)

1/2" Jam Nut (2)

For Adjustable Track Bar:


Bushings (2)

Sleeve

Tie-Rod End

Jam Nut

Cotter Pin


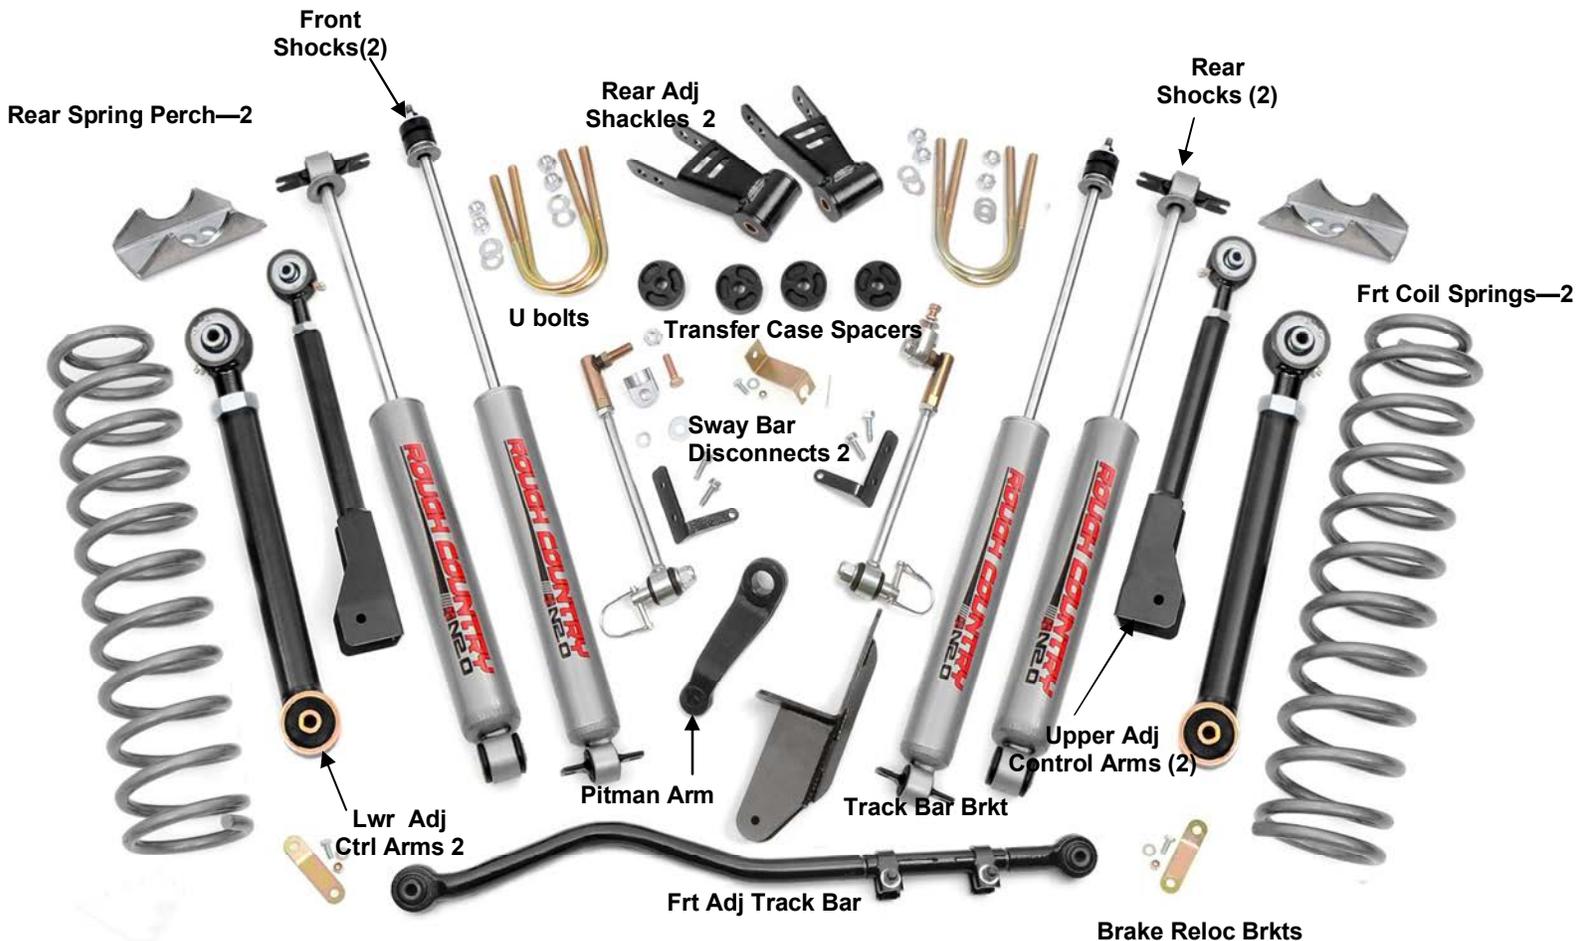


PRE-INSTALLATION INSTRUCTIONS



1. Layout the product . see page 7 for product layout and confirm that you have all needed products and know where they install.
2. Pre-assemble both lower control arms by putting the bushings and sleeves in each end. Grease the bushings with waterproof (lithium based) grease to prevent squeaking.
3. Verify before installation rear axle tube diameter is 2 ¾" or 3". Both sets are included with this kit to accommodate rear axle options of the vehicle.

INSTALLATION INSTRUCTIONS

1. Secure and properly block the tires on the vehicle on a level concrete surface.
2. Jack up the vehicle and place the front of the vehicle on jack stands.
3. Remove the front wheels and tires.
4. Support the axle with a floor jack.
5. Remove the stock shock absorbers using a 15mm wrench. The stock bolts and nuts on the bottom of the shock will be reused. Note: Access to the upper shock studs will be obtained through the engine compartment. It also may be necessary to temporarily remove the washer fluid reservoir to access the driver side upper shock mount nut.
6. Remove the sway bar links on both sides using a T-55 torx bit /19mm wrench and a 15mm for the upper nut . **SEE PHOTO 1.**
7. Remove the track bar from the axle housing on passenger side using a 15mm wrench. **SEE PHOTO 2.** Retain factory bolt and flag nut for re-use.

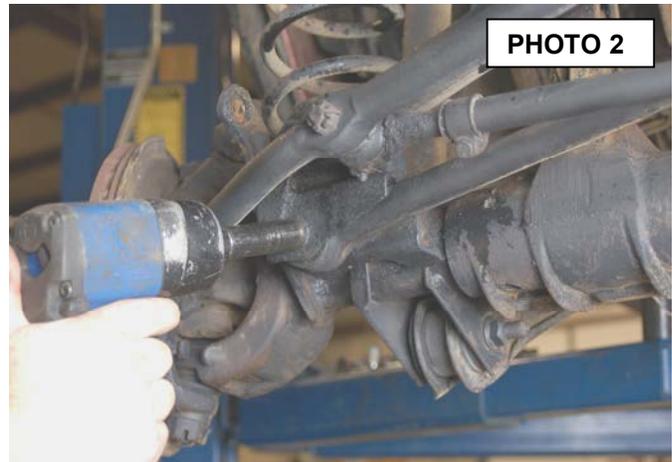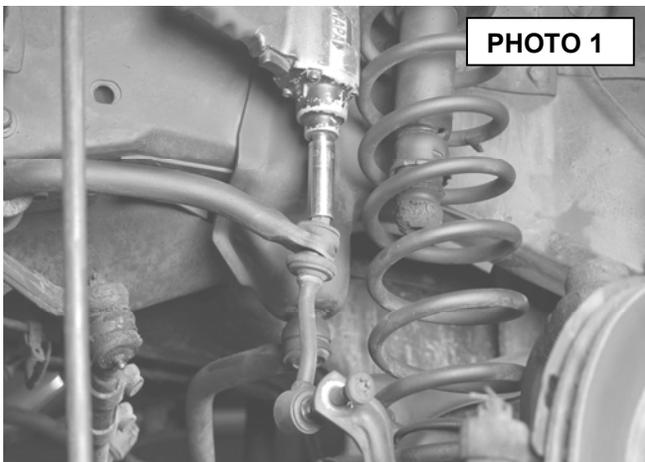

8. Locate and remove the coil clip on the driver side lower coil spring seat using a 13mm wrench. Lower the axle to allow for removal of the coil spring. Do not overextend the brake lines. The caliper can be removed from the rotor to allow the axle to lower. Do not let the brake caliper hang from the brake line. Remove coil spring. **SEE PHOTO 3.** Repeat for opposite side.
9. With the differential supported, remove the driver side lower control arm from the vehicle using a 21mm wrench. **SEE PHOTO 4.** Retain factory hardware, as it will be reused. Repeat for opposite side.
10. Lower the axle using the floor jack. With the axle lowered, install coil springs on both sides, making sure the lower coil wrap is seated in the lower spring cup. Install factory spring retainer and secure with factory hardware using a 13mm wrench.

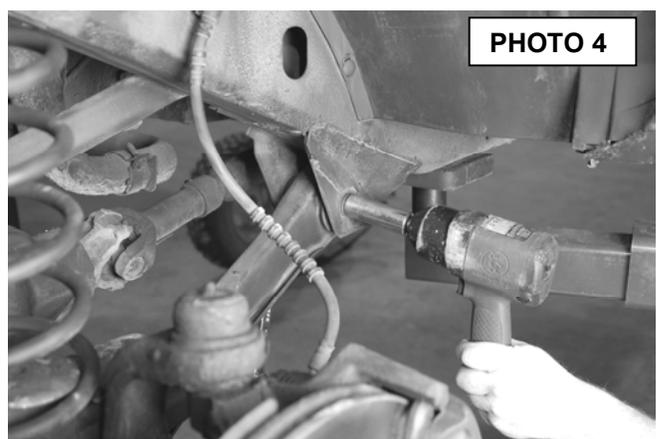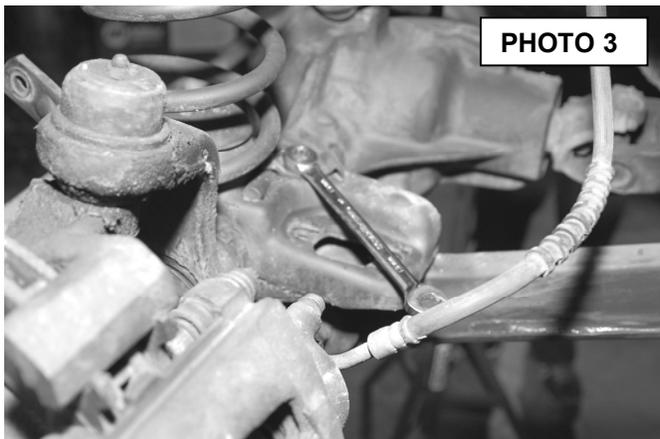

11. Adjust new lower control arm to 16.5+from center to center and install using factory hardware. **SEE PHOTO 5.**
12. Remove the stock upper control arm by removing the factory hardware from the axle bracket and then removing the nut and bolt from the frame bracket doing one side at a time. Do not remove the factory bushing in the axle mount . it is reused. Lubricate bushings with a lithium grease or equivalent and install the new bushings and sleeves in the Rough Country control arm. Adjust the upper Rough Country adjustable control arm to a measurement of **15 ½”** from center to center and install on the vehicle using factory hardware . do not tighten at this time. **SEE PHOTO 6.**



12. **PHOTO 7** shows the caster adjustment bolts on the lower control arms. These bolts can be adjusted in or out if needed for additional caster alignment. Final alignment should be performed by a professional.
13. Install the Rough Country adjustable track rod in the factory location axle mount using factory hardware. Do not attach the frame end of the new track rod at this time. Installation is done after the vehicle is on the ground and axle is centered. **SEE PHOTO 8.**




14. Install the new shock absorbers **Part # 658562** and tighten the factory bottom bolts using a 13mm wrench and the upper with a 9/16 wrench . Reinstall the wiper reservoir if removed.
15. Install the front wheels and tires. Jack up the vehicle, Remove jack stands and lower the vehicle to the ground.
16. Check to make sure the body is centered over the axle. Unlocking the steering wheel and turning the wheel to move the body, do this until the track rod hole lines up. Install the track rod with the stock bolt /flag nut and using a 15mm wrench. Torque to factory specs.


****Control Arm Note** Make sure flex joint housing is centered in mount before tightening jam nut. Should not be touching either side.****

FRONT SWAY BAR DISCONNECT INSTRUCTIONS


1. Install the upper sway bar mount on the top of front sway bar where the stock link was secured, using the supplied 3/8"x 1.25"+bolt lock washer and thick washer. **See Photo 1.**
2. Using a hammer, remove the lower stock sway bar link mounting bolt from the axle mount.
3. Install supplied pin on the axle. See **Photo 2.** Hold using a screwdriver & tighten 1/2"+lock nut using a 3/4"+wrench.

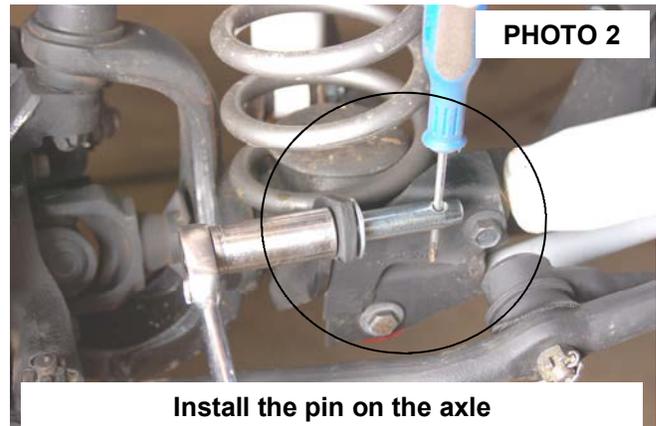

4. Assemble the sway bar link with the link body, the jam nut and rod end. Adjust the sway bar to a length of 11 1/4" from top to bottom. Tighten the jam nut against the rod end using a 5/8" & 3/4" wrench.
5. Install the sway bar link on the upper sway bar mount with the supplied 1/2" flange lock nut. **See Photo 3.** Tighten using a 5/8" & 3/4" wrench.
6. With the sway bar link installed on the supplied frame bracket, swing the bracket and sway bar link up and position the bracket on the frame as shown in **Photo 4.**
7. While holding the bracket in place, remove the sway bar link from the bracket. Mark and drill the holes using a 1/4"+

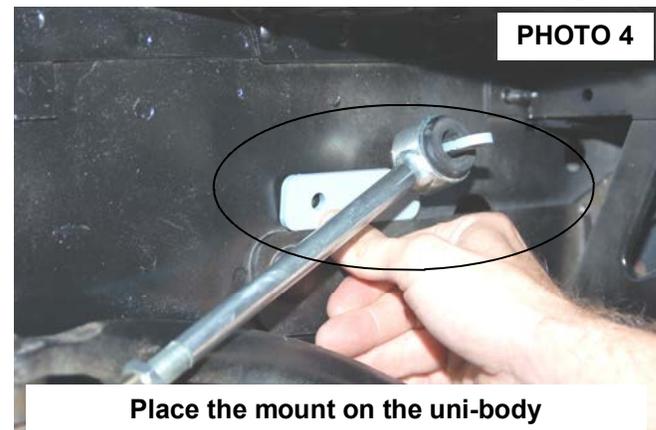

- drill bit.
8. Install the supplied 5/16"x 1"+self tapping bolt in the drilled holes and tighten using a 1/2"+socket. **See Photo 5. Do not over tighten the self tapping bolts.**
 9. Install on the lower axle mounting pin. Install the disconnect pin. **See Photo 6. Note: When disconnected the hitch pin will be used on the upper mount to secure the sway bar link to the mount.**

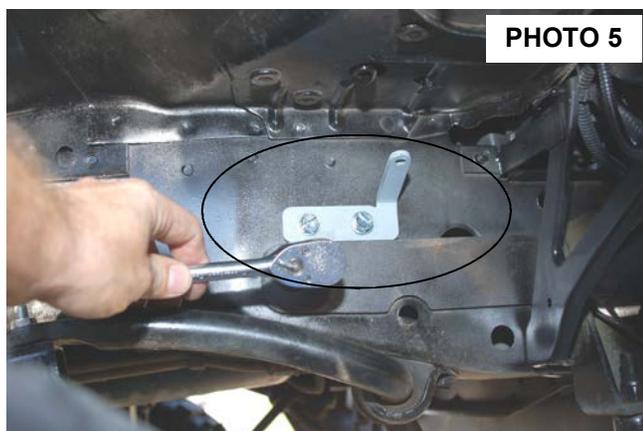

FRONT BRAKE LINE BRACKET INSTALLATION

1. Remove the front brake line from the frame using a T-40 Torx bit.
2. Attach the brake line to the new brake line extension bracket with the supplied 5/16+hardware as shown in **PHOTO 1** and tighten using a 1/2+wrench.
3. Install the new bracket into the stock hole with the stock hardware using the T-40 bit.



PHOTO 1

PITMAN ARM INSTALLATION

1. Remove the cotter pin and nut that secures the steering link to the arm. Retain the nut to be reused. Separate the drag link ball stud from the pitman arm with a puller tool. Do not use a pickle fork.
2. Mark the position of the original pitman arm. Remove the nut and washer from the steering gear box. Align and install new pitman arm on the steering gear shaft. Install the washer and nut. Tighten to 185 ft. lbs.
3. Install the drag link ball stud to the pitman arm. Install the nut and tighten to 60 ft lbs. Install supplied cotter pin. **SEE PHOTO 2.**



PHOTO 2

REAR LIFT INSTALLATION

1. Remove rear factory shocks using a 13mm wrench on top and a 3/4+wrench on bottom and retain hardware.
2. Chock the front wheels and jack up the rear of the vehicle and place the vehicle on jack stands. Remove the wheels and tires.
3. Working from the drivers side, remove the factory u-bolts and lower the axle with a floor jack. Repeat for passenger side. Install new rear springs at this time with factory hardware using 21mm wrench and skip to Step 10. The larger spring eye will bolt back in the stationary mount.
4. Remove the stock shackle from the frame mount using a 21mm wrench. **SEE PHOTO 3.** Locate and either grind or cut off the excess from the bolt pictured in **PHOTO 4.** This will allow the shackle to move rearward.



PHOTO 3

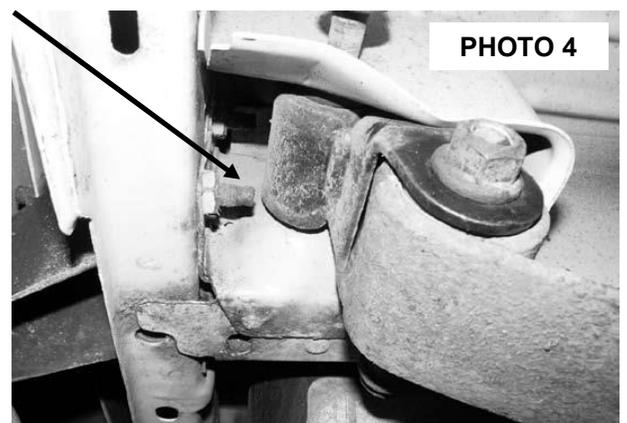


PHOTO 4

5. Install the new Rough Country lifted shackle and secure with supplied 9/16+x 4+hardware in the top hole and the 14mm x 110mm in the bottom hole.. Do not fully tighten the hardware at this time. **See PHOTO 5.**
6. This kit includes 2 3/4-& 3+diameter u-bolts for rear axle options on the Jeep. Confirm axle diameter and use appropriate u-bolt. Install the u-bolts and torque to factory specs using 3/4+wrench.
7. Install the new shocks **Part # 650328** with factory hardware. Torque the upper using a 13mm wrench and lower bolts using 3/4+wrench to factory specs. Repeat for other side.
8. Install the tires and wheels. Jack up the vehicle and remove the jack stands. Lower the vehicle to the floor.
9. Torque the frame bolts, and shackle bolts to factory specs using a 21mm wrench.




PHOTO 5

REAR BRAKE LINE INSTALLATION INSTRUCTIONS

1. Next remove the E-clip holding the brake line on at the frame mount. This will be extended with a bracket.
2. Bolt the z drop bracket to the frame using the supplied 5/16+hardware and tighten using a 1/2+wrench. Install the brake line into the new bracket with the stock e-clip. **SEE PHOTO 1.**

TRANSFER CASE DROP INSTALLATION INSTRUCTIONS

1. Position the floor jack under the transfer case cross member and lightly apply pressure.
2. Loosen and remove the bolt and the nut on stud on the driver side transfer case cross member.
3. Loosen and remove the bolt and nut on the drivers side cross member.
4. Carefully lower the transfer case down to the point it clears the stud.
5. Using 2 nuts to form a jam nut on the stud, remove the stud from the cross member on both sides.
6. Carefully lower the transfer case cross member to allow clearance for installation of transfer case spacer and sleeve.
7. Place the spacer between the frame and cross member; install the new 10mm x 60m bolts through cross member, spacer and into uni-body. Raise the transfer case and tighten bolts to 35 ft/lbs. **See PHOTO 2.**

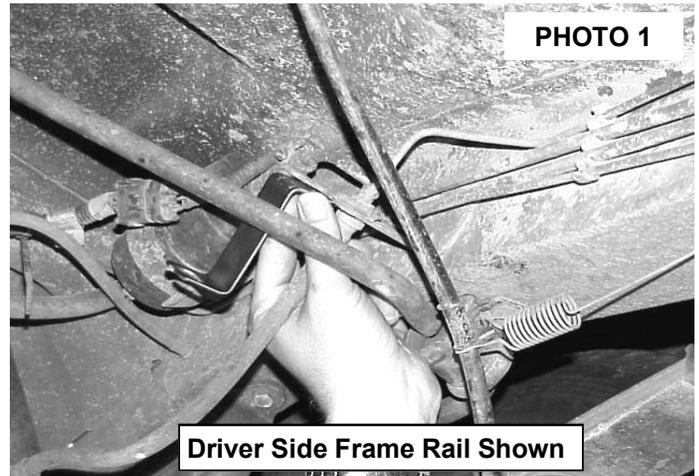

POST INSTALLATION INSTRUCTIONS

1. Check all fasteners for proper torque.
2. Check to ensure there is adequate clearance between all rotating, mobile, fixed and heated members.
3. Check steering gear for interference and proper working order.
4. Before driving the vehicle, check to make sure brakes are operating properly and do not need to be bleed.
5. Perform steering sweep.
6. Check to ensure brake hoses have sufficient slack and will not contact rotating, mobile, or fixed members. Adjust lines/brackets to eliminate interference and maintain proper working order. Failure to perform inspections may result in component failure.
7. Have headlight readjusted to proper settings.
8. Take the vehicle to be aligned to factory specifications by a certified alignment shop.
9. Re torque all fasteners after 500 miles. Visually inspect components and re torque fasteners during routine vehicle service.

MAINTENANCE INFORMATION

It is the ultimate buyers responsibility to have all bolts/nuts checked for tightness after the first 100 miles and then every 100 miles. A qualified mechanic must inspect wheel alignment steering system, suspension and driveline systems at least every 3000 miles.

ROUGH COUNTRY

SUSPENSION SYSTEMS®

We have most of the additional accessories you need for your Comanche. We have Diff Guards, Slip Yoke Eliminator, Drive Shafts, Steering Stabilizers, Adjustable Controls Arms, Etc.



\$49.95
Stabilizer



Drive-Shafts
Call For Price\$



\$269.00
SYE Kits



Thank you for purchasing a Rough Country Suspension System.

By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable, State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.

