

54515
05-09 FORD
MUSTANG LX



54515
05-09 FORD
MUSTANG LX

05-09 Ford Mustang LX **Upper Class Series Grille**

TOOLS REQUIRED:

Slotted Screwdriver
8mm Wrench
1/4" Drill Bit & Drill Motor

PARTS LIST:

(6) 2" Flange Brackets
(6) 6/32" Nylon Lock Nuts
(1) Upper Class Grille

Step 1

PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION. Open the hood; remove the radiator cover. There are 9 plastic clips, pry them up with a slotted screwdriver and remove them from the radiator cover. (Fig 1) Lift the radiator cover and set it aside.

Step 2

Once the radiator cover is removed, you will see 4 plastic latches on the sides of the factory grille that hold the factory grill into the bumper cover. Using a slotted screwdriver pry open the 4 latches on the sides of the grille. (Fig 2) Once the side latches are loose you can pull the top of the factory grille forward to reach behind the factory grille to install the brackets and nuts.

Step 3

Take the upper class grille and insert it into the opening in the factory grille. The 6 studs on the upper class grille will go through the openings on the factory grille. Make sure the upper class grille is fully seated in the factory grille opening and put a flange bracket over the threaded stud and a nylon lock nut over the bracket. (Fig 3) Tighten the lock nut. Repeat on the remaining 5 threaded studs. Push the factory grille back into place, make sure to secure the 4 latches on the side of the grille. Reinstall the radiator cover. Installation complete.

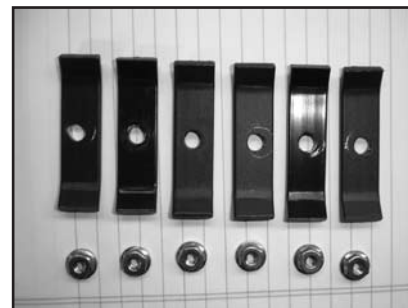


Fig 1

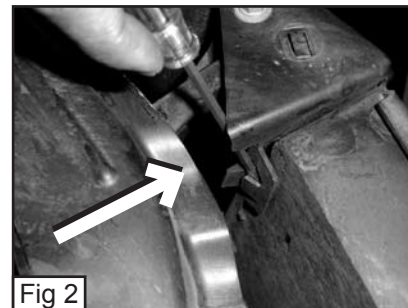


Fig 2

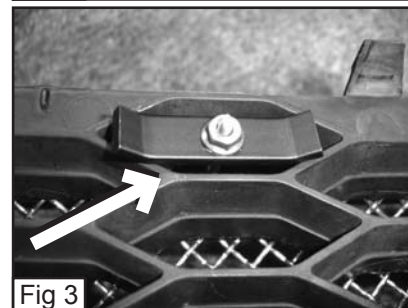


Fig 3